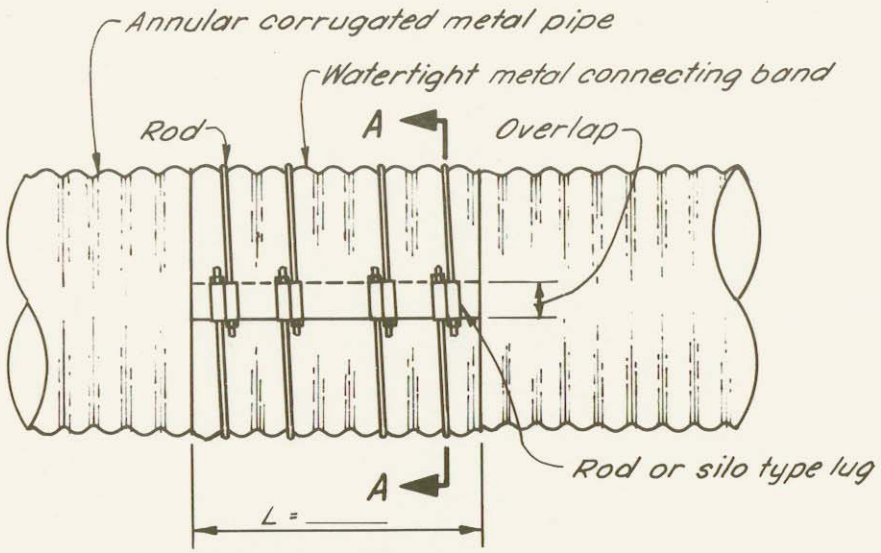

ELEVATION

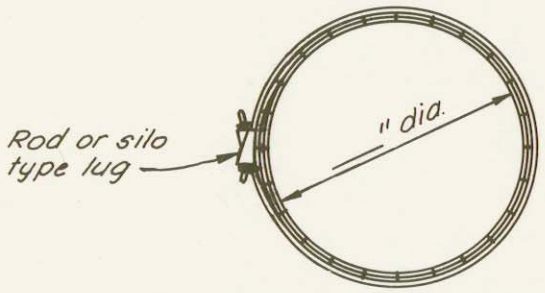

SECTIONAL ELEVATION A-A

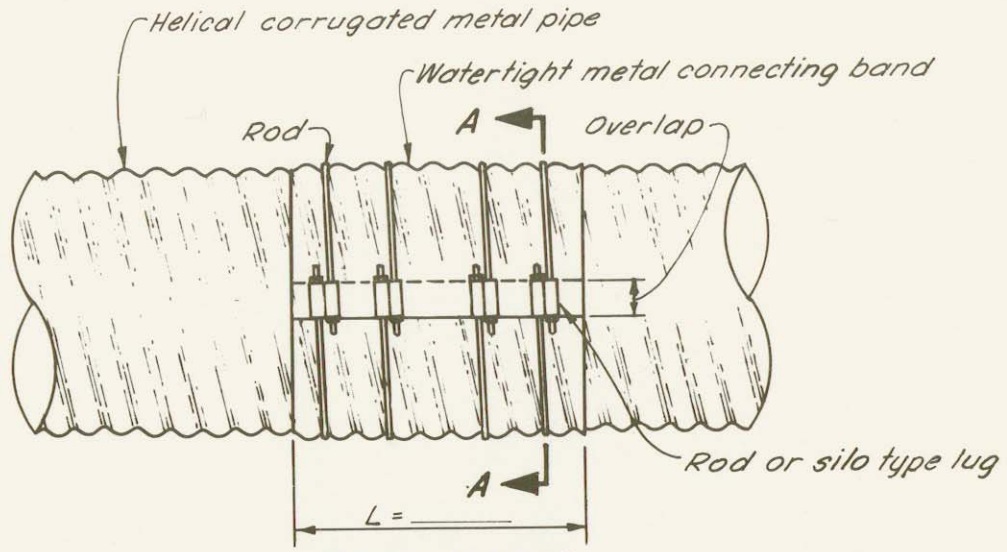

ELEVATION

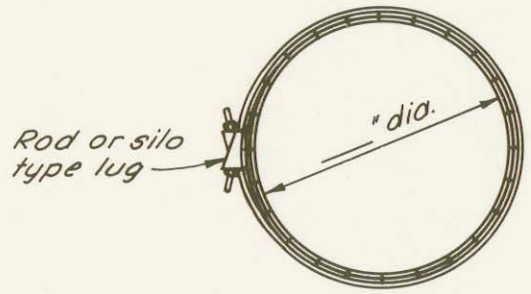

SECTIONAL ELEVATION A-A

DIMENSIONS AND QUANTITIES

PIPE DIA. INCHES	MINIMUM "L" INCHES	APPROX. OVERLAP INCHES	NUMBER OF RODS & LUGS	MINIMUM ROD DIA. IN.	NEOPRENE GASKET WIDTH INCHES	ASPHALT MASTIC GAL.
6-18	12	2	2	1/2	12	1/2
21-30	24	3	4	1/2	12	1 1/2
36-48	24	6	4	1/2	12	2

NOTES:

1. WATERTIGHTNESS WILL BE OBTAINED BY USE OF (1) 3/8" THICK NEOPRENE GASKET (WIDTH AS SHOWN) OR (2) ASPHALT MASTIC SEALING MATERIAL TO COVER FULL WIDTH OF BAND.
2. CROSS OUT BAND AND QUANTITIES NOT APPLICABLE.

JOB PLAN NO. 3.0

WATERTIGHT CONNECTING BAND FOR ANNULAR AND HELICAL CORRUGATED METAL PIPE

OPERATOR: _____

CONSERVATION DISTRICT: _____

U. S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE

	Date		
Designed		Approved by	
Drawn		Title	
Traced		Title	
Checked		Sheet No of	Drawing No

USDA-SCS-LINCOLN, NEBR. 1974-SR

5, N-29, 073.30