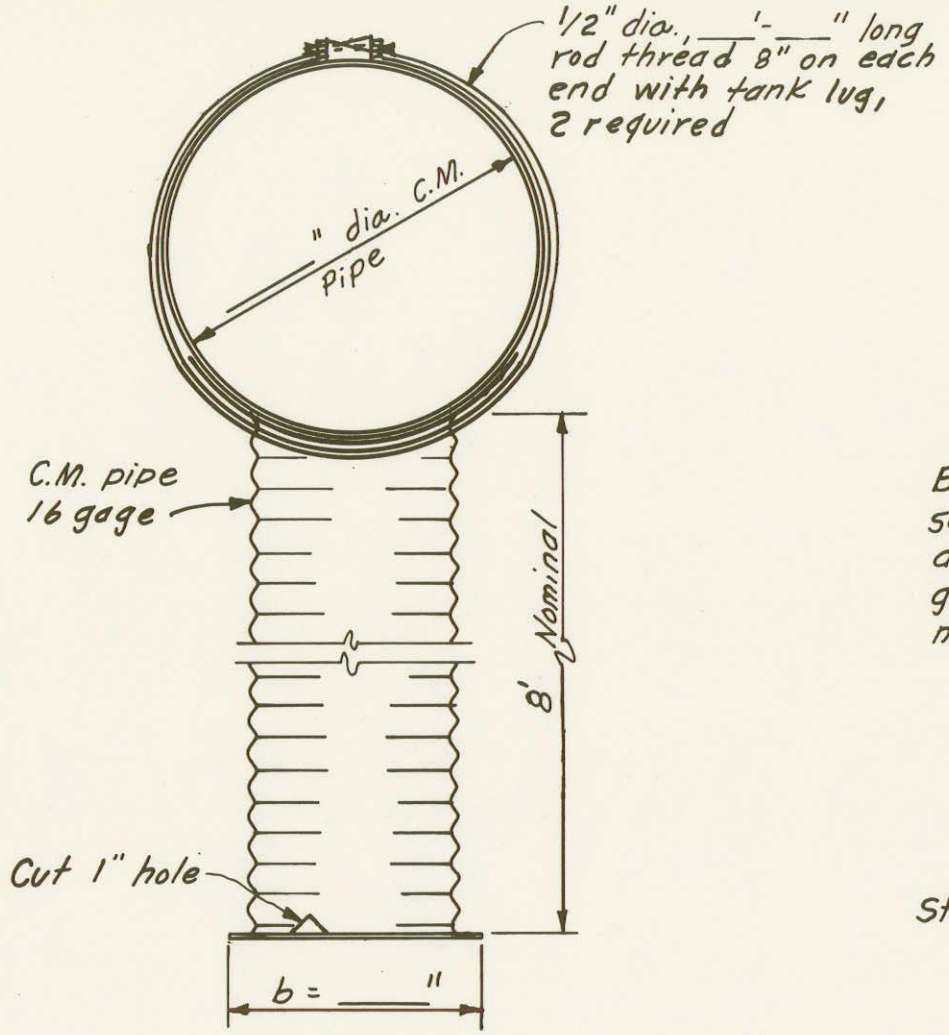

END VIEW

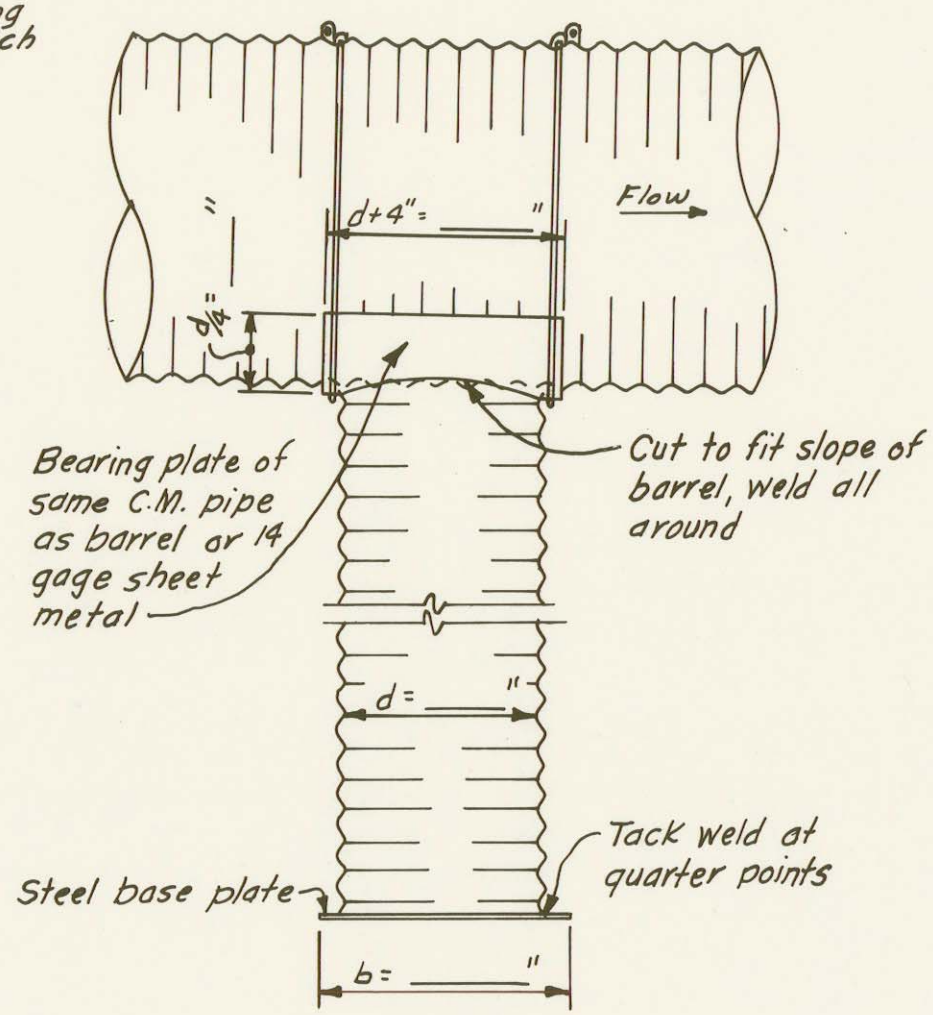

SIDE VIEW

C.M. PIPE SUPPORT

DIMENSIONS

DIA.	PIPE SUPPORT		BASE PLATE		ROD
IN.	IN.	THICKNESS - GA.	b - IN.	THICKNESS - IN.	LENGTH-FT.-IN
6	6	16	7 (ROUND)	0.108	2-6
8	6	16	7 (ROUND)	0.108	3-1
10	6	16	7 (ROUND)	0.108	3-7
12	6	16	8 (SQUARE)	0.108	4-1
15	8	16	10 (SQUARE)	0.108	4-11
18	10	16	13 (SQUARE)	0.108	5-8
21	12	16	14 (SQUARE)	0.108	6-5
24	12	16	16 (SQURE)	0.108	7-0

NOTES:

1. C.M. PIPE SHALL BE FABRICATED IN ACCORDANCE WITH FED. SPEC. WW-P-405
2. REQUIREMENTS FOR COATING THE SUPPORTED PIPE SHALL ALSO APPLY TO THE PIPE SUPPORT.
3. HEAT DAMAGED AREAS ON GALVANIZED METAL SHALL BE THOROUGHLY WIRE BRUSHED AND PAINTED WITH TWO COATS OF ZINC DUST-ZINC OXIDE PRIMER CONFORMING TO FED. SPEC. TT-P-641, TYPE III.
4. THE BASE PLATE SHALL BE GALVANIZED BEFORE WELDING. WEIGHT OF ZINC COATING SHALL BE IN ACCORDANCE WITH ASTM A444.

JOB PLAN NO. 4.3

C.M. PIPE SUPPORT

OPERATOR: _____

CONSERVATION DISTRICT: _____

U. S. DEPARTMENT OF AGRICULTURE
SOIL CONSERVATION SERVICE

	Date		
Designed		Approved by	
		Title	
Drawn		Title	
Traced		Sheet No of	Drawing No.
Checked			