



NOTES:

1. THE FLEXIBLE COUPLING SHALL BE MADE OF A RUBBER-TYPE MATERIAL, WITH TWO STAINLESS STEEL CLAMPS.
2. THE PVC PIPE SHALL HAVE AN SDR OF 43 OR LESS.
3. WHETHER THE INLET ENTERS THE JUNCTION WITH THE MAIN DIRECTLY OR IS OFFSET, ONE OF THE FOLLOWING CONNECTIONS SHALL BE USED TO OBTAIN A WATERTIGHT JOINT:
 - A. PLASTIC TUBING
 - REDUCING COUPLER
 - SNAP COUPLER
 - SPLIT COUPLER
 - B. CLAY OR CONCRETE TILE
 - PVC BELL ADAPTER
 - FLEXIBLE COUPLING
 - FLEXIBLE REDUCING COUPLING
 - FLEXIBLE TRANSITION COUPLING

SEE REVERSE SIDE FOR ADDITIONAL INFORMATION

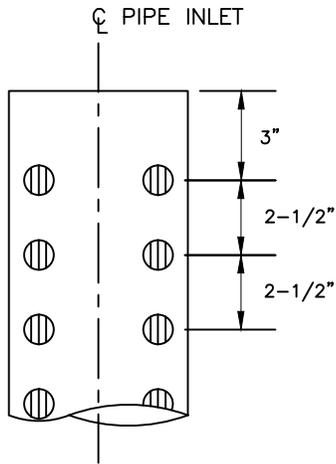

ROUND HOLE INTAKE
 DRILL 4 ROWS (90° SPACING)
 OF 1" DIAMETER HOLES AT THE
 SPACING SHOWN.

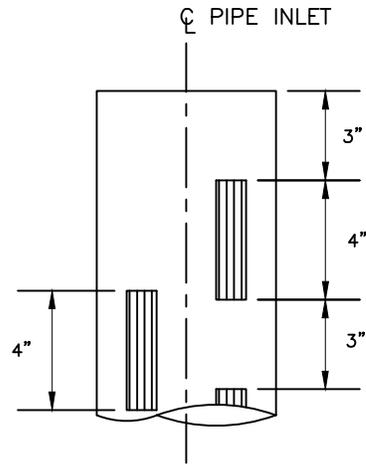

SLOTTED INTAKE
 CUT 1" x 4" SLOTS IN 4
 ROWS (90° SPACING) AT THE
 SPACING SHOWN.

