

QUANTITY ESTIMATE*	
EXCAVATION -----	_____ CU. YD.
GEOTEXTILE WOVEN/NON WOVEN CLASS _____	_____ SQ. YDS.
CRUSHED STONE -----	_____ CU. YD.
CRUSHED STONES CONSISTS OF 100% PASSING 3/4" SIEVE AND 10% MAXIMUM PASSING THE #200 SIEVE.	
GRADED ROCK -----	_____ CU. YD.
GRADED ROCK: 100% PASSING THE BASE COURSE THICKNESS DIMENSION WITH A MAX. OF 10% PASSING THE 3/4" SIEVE. ALL SIZES BETWEEN THE LIMITS ARE TO BE REPRESENTED.	
HOOF CONTACT MATERIAL -----	_____ CU. YD.
SEEDING -----	_____ ACRES

*ESTIMATED TO THE NEAT LINES AND GRADES


NOTES:

1. COMPACT SURFACING MATERIAL BY EQUIPMENT TRAVEL.
2. CROSSINGS SHALL HAVE THE TOP-MOST SURFACE LAYER AT THE SAME LEVEL AS THE NATURAL STREAMBED IMMEDIATELY UPSTREAM AND DOWNSTREAM FROM THE CROSSING.
3. HOOF CONTACT MATERIAL WILL NOT BE PLACED BELOW THE OHWM ELEVATION

SEE REVERSE SIDE FOR ADDITIONAL INFORMATION

SITE OR STATION _____

THIS STANDARDIZED DESIGN MUST BE ADAPTED TO THE SPECIFIC SITE.

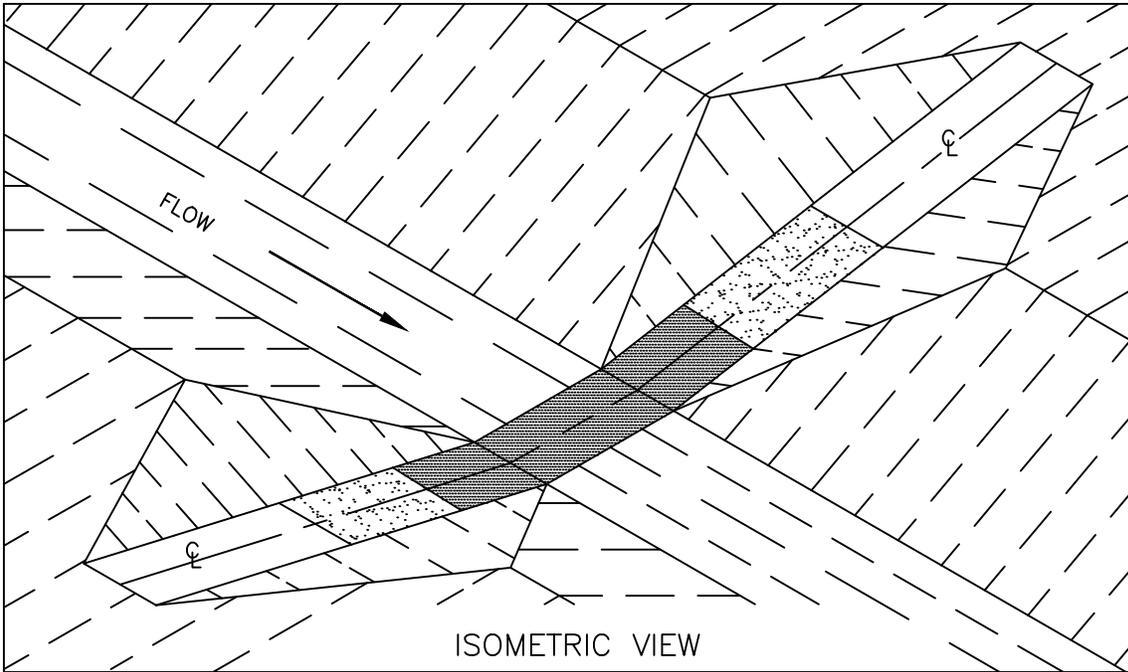

SURFACING MATERIAL GRADATION

PERCENT PASSING <u>BY WEIGHT</u>	<u>SIZE (INCHES)</u>
100	_____
60-85	_____
25-50	_____
5-20	_____
0-5	_____