


PROFILE ALONG CENTERLINE OF CROSSING

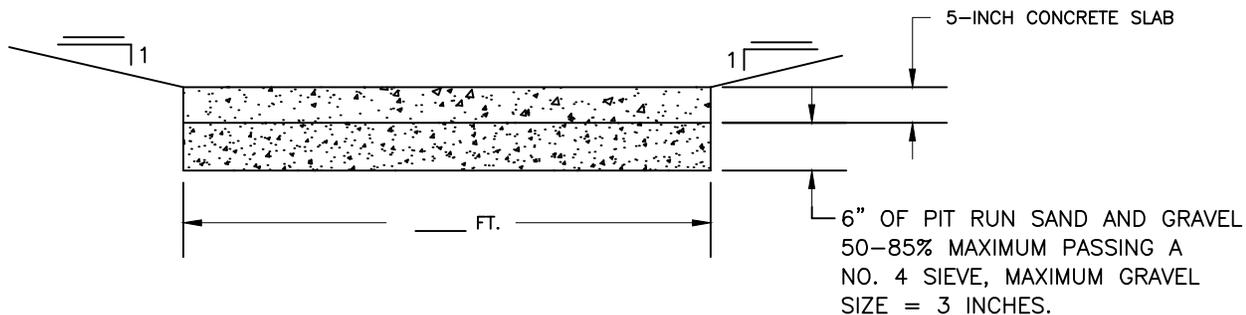

SECTION A-A

QUANTITY ESTIMATE

SAND AND GRAVEL -----	_____ CU. YD.
EXCAVATION (WI CONST. SPEC. 2) -----	_____ CU. YD.
CONCRETE (WI CONST. SPEC. 4) -----	_____ CU. YD.
SEEDING -----	_____ ACRES

NOTES:


- CROSSINGS SHALL HAVE THE TOP-MOST SURFACE LAYER AT THE SAME LEVEL AS THE NATURAL STREAMBED IMMEDIATELY UPSTREAM AND DOWNSTREAM FROM THE CROSSING.
- THE CONCRETE SURFACE SHALL BE ROUGHENED.

SEE REVERSE SIDE FOR ADDITIONAL INFORMATION

SITE OR STATION _____

THIS STANDARDIZED DESIGN MUST BE ADAPTED TO THE SPECIFIC SITE.

 <p>United States Department of Agriculture</p> <p>Natural Resources Conservation Service</p>	<p>CONCRETE CROSSING</p> <p>CLIENT: _____</p> <p>COUNTY: _____</p>	<p>Date _____</p> <p>Designed _____</p>	<p>File Name WI-406B</p>
		<p>Drawn _____</p>	<p>Date 07/14</p>
		<p>Checked _____</p>	
		<p>Approved _____</p>	<p>Sheet of _____</p>

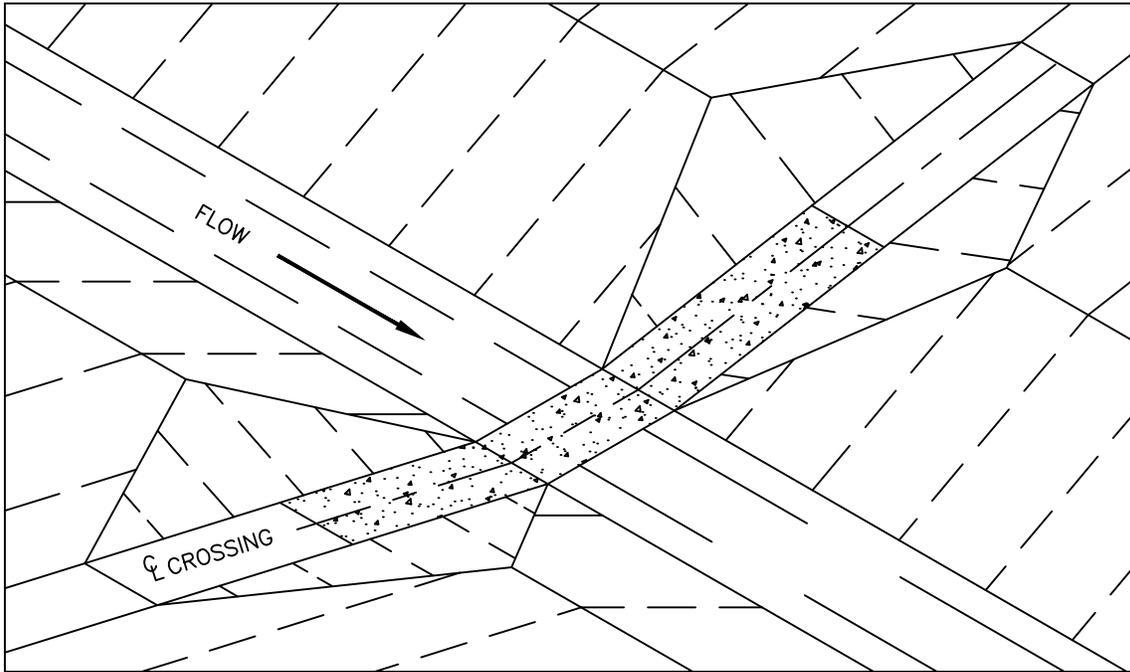

ISOMETRIC VIEW
CONCRETE CROSSING