


PROFILE ALONG CENTERLINE OF CROSSING

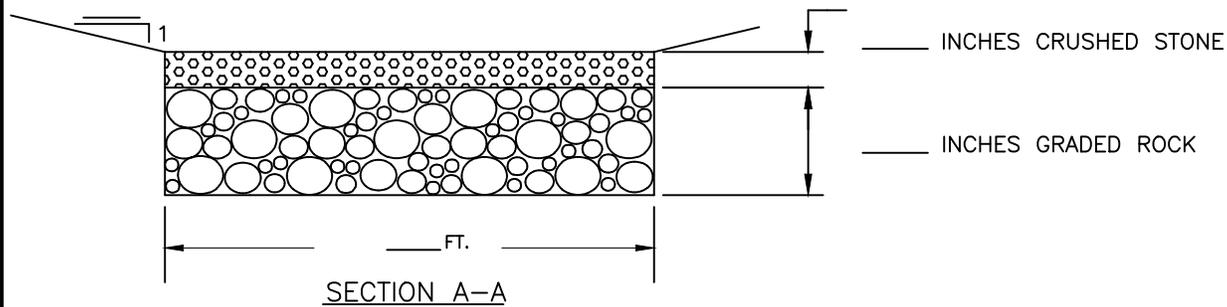

SECTION A-A

QUANTITY ESTIMATE*	
EXCAVATION -----	___ CU. YD.
CRUSHED STONE -----	___ CU. YD.
CRUSHED STONES CONSISTS OF 100% PASSING 3/4" SIEVE AND 10% MAXIMUM PASSING THE #200 SIEVE.	
GRADED ROCK -----	___ CU. YD.
GRADED ROCK: 100% PASSING THE BASE COURSE THICKNESS DIMENSION WITH A MAX. OF 10% PASSING THE 3/4" SIEVE. ALL SIZES BETWEEN THE LIMITS ARE TO BE REPRESENTED.	
SEEDING -----	___ ACRES

SEE REVERSE SIDE FOR ADDITIONAL INFORMATION

- NOTES: \*ESTIMATED TO THE NEAT LINES AND GRADES
1. COMPACT SURFACING MATERIAL BY EQUIPMENT TRAVEL.
  2. CROSSINGS SHALL HAVE THE TOP-MOST SURFACE LAYER AT THE SAME LEVEL AS THE NATURAL STREAMBED IMMEDIATELY UPSTREAM AND DOWNSTREAM FROM THE CROSSING

SITE OR STATION \_\_\_\_\_

THIS STANDARDIZED DESIGN MUST BE ADAPTED TO THE SPECIFIC SITE.




ROCK CROSSING  
(ROCK BASE)

CLIENT: \_\_\_\_\_  
COUNTY: \_\_\_\_\_

Designed \_\_\_\_\_ Date \_\_\_\_\_  
Drawn \_\_\_\_\_  
Checked \_\_\_\_\_  
Approved \_\_\_\_\_

File Name  
WI-405B  
Date  
07/14  
Sheet of

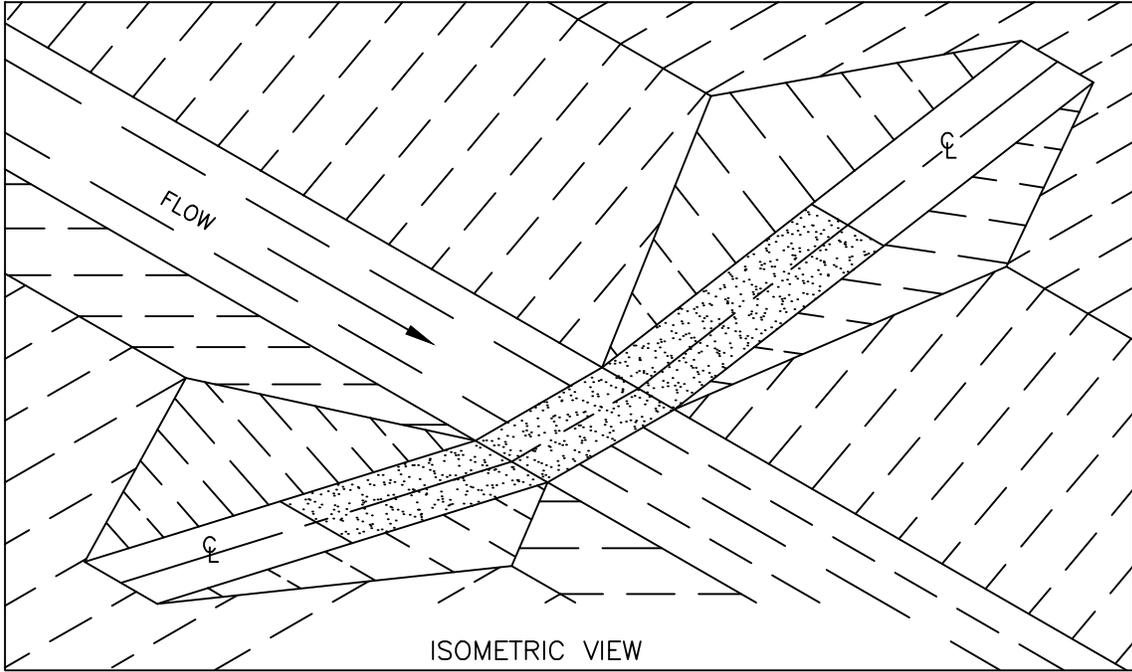

GRADED ROCK MATERIAL GRADATION

<u>PERCENT PASSING</u> <u>BY WEIGHT</u>	<u>SIZE (INCHES)</u>
100	_____
60-85	_____
25-50	_____
5-20	_____
0-5	_____