


PROFILE ALONG CENTERLINE OF CROSSING

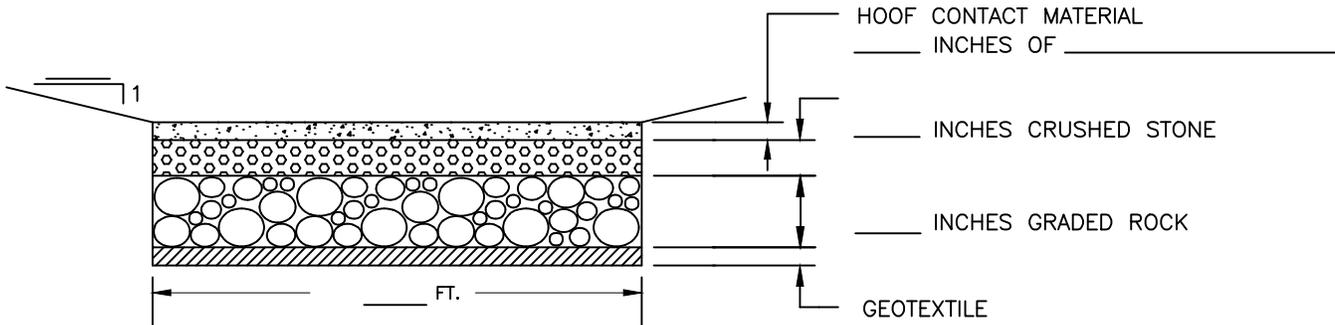

SECTION A-A

QUANTITY ESTIMATE*	
EXCAVATION -----	_____ CU. YD.
GEOTEXTILE WOVEN/NON WOVEN CLASS _____	_____ SQ. YDS.
CRUSHED STONE -----	_____ CU. YD.
CRUSHED STONES CONSISTS OF 100% PASSING 3/4" SIEVE AND 10% MAXIMUM PASSING THE #200 SIEVE.	
GRADED ROCK -----	_____ CU. YD.
GRADED ROCK: 100% PASSING THE BASE COURSE THICKNESS DIMENSION WITH A MAX. OF 10% PASSING THE 3/4" SIEVE. ALL SIZES BETWEEN THE LIMITS ARE TO BE REPRESENTED.	
HOOF CONTACT MATERIAL -----	_____ CU. YD.
SEEDING -----	_____ ACRES

SEE REVERSE SIDE FOR ADDITIONAL INFORMATION

\*ESTIMATED TO THE NEAT LINES AND GRADES

NOTES:

1. COMPACT SURFACING MATERIAL BY EQUIPMENT TRAVEL.
2. CROSSINGS SHALL HAVE THE TOP-MOST SURFACE LAYER AT THE SAME LEVEL AS THE NATURAL STREAMBED IMMEDIATELY UPSTREAM AND DOWNSTREAM FROM THE CROSSING.

\_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

SITE OR STATION \_\_\_\_\_

THIS STANDARDIZED DESIGN MUST BE ADAPTED TO THE SPECIFIC SITE.




ROCK CROSSING  
(GEOTEXTILE BASE)

CLIENT: \_\_\_\_\_  
 COUNTY: \_\_\_\_\_

Date \_\_\_\_\_  
 Designed \_\_\_\_\_  
 Drawn \_\_\_\_\_  
 Checked \_\_\_\_\_  
 Approved \_\_\_\_\_

File Name  
 WI-405C  
 Date  
 07/14  
 Sheet of \_\_\_\_\_

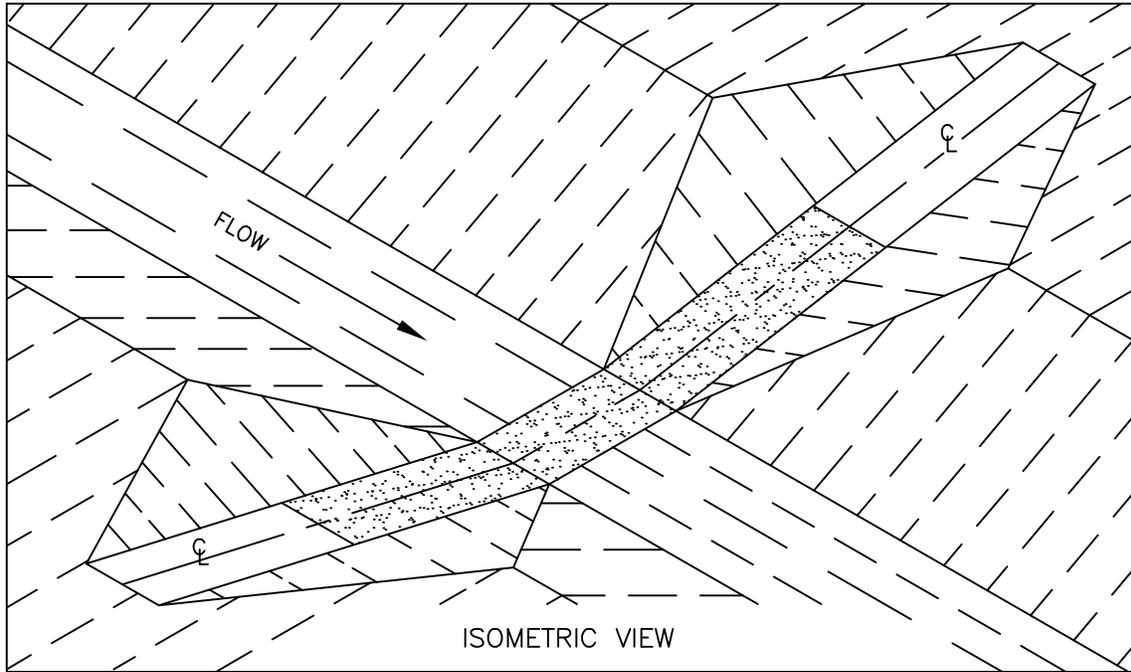

GRADED ROCK MATERIAL GRADATION

<u>PERCENT PASSING</u> <u>BY WEIGHT</u>	<u>SIZE (INCHES)</u>
100	_____
60-85	_____
25-50	_____
5-20	_____
0-5	_____