

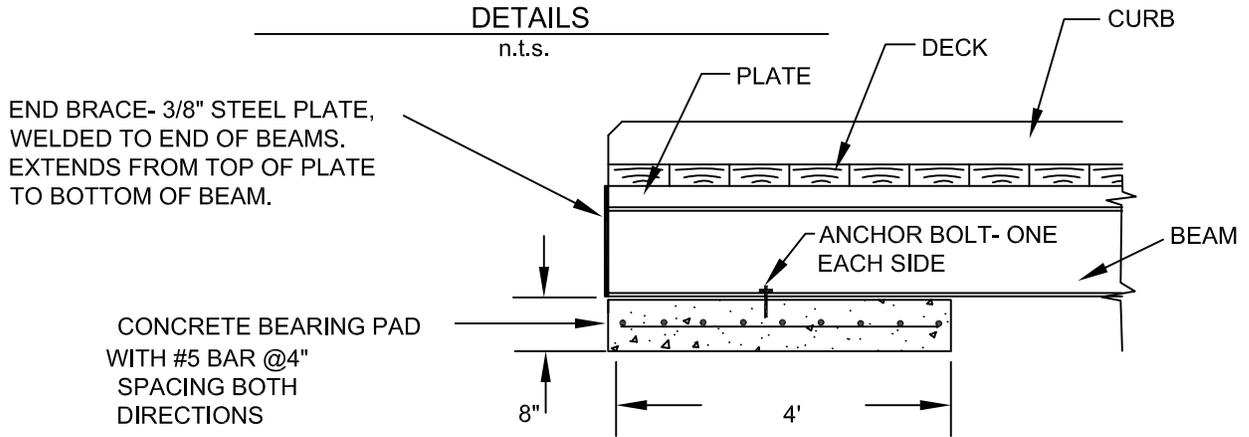


LATERAL BRACING AND BEARING PAD
DETAILS

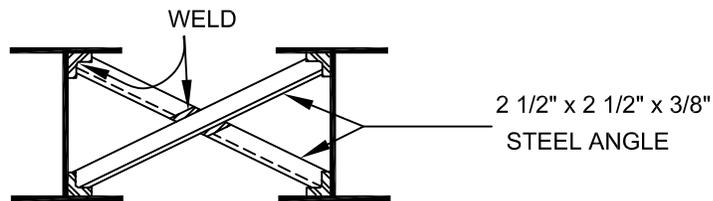

BEAMS SHALL BE ANCHORED TO BEARING PAD USING 2- 1/2"x 6" ANCHOR BOLTS SET ADJACENT TO BEAM FLANGE. OVERLAP WASHER OR 1/4" STEEL PLATE ON FLANGE. USE 3" MINIMUM WASHER OR PLATE.

LATERAL BRACING: L 2 1/2" x 2 1/2" x 3/8" STEEL ANGLE @ 10' INTERVALS ACROSS THE CLEAR SPAN

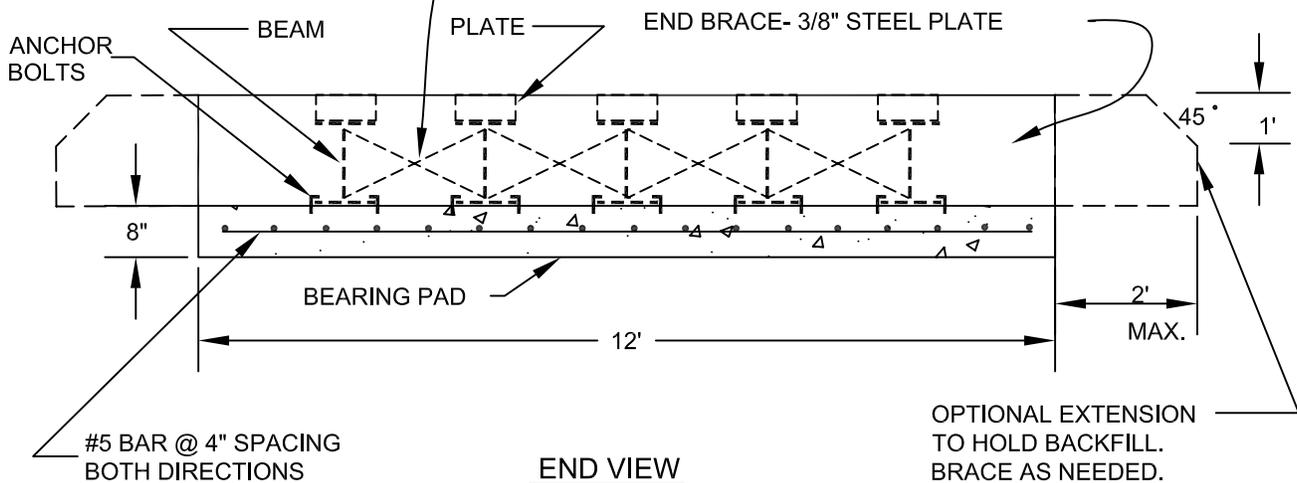

DETAIL
LATERAL BRACING



TIMBER BRIDGE
DETAILS

ISSUE DATE: 4/04
DRAWING NO. TB-3D