


FOREST ROAD TANK TRAP

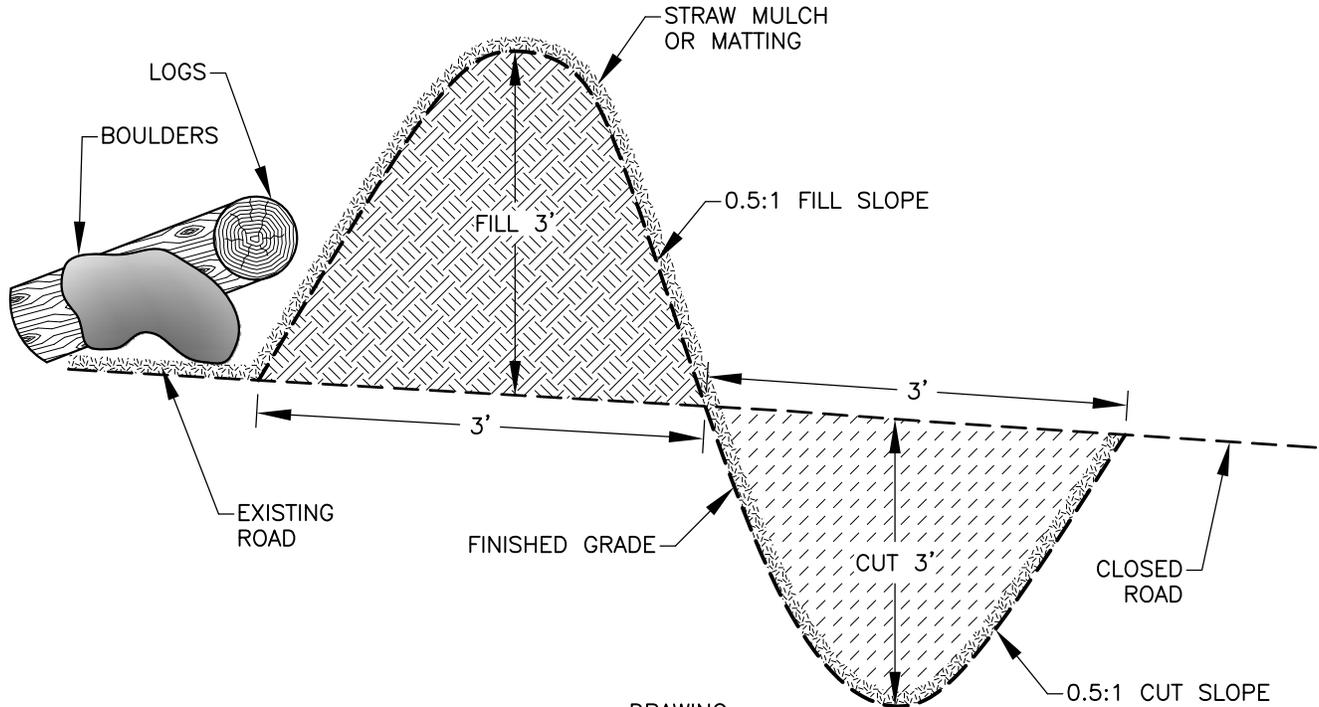

DRAWING
NOT TO SCALE

CONSTRUCTION NOTES:

1. Tank traps to be constructed at each end of the road closure.
2. Place fill directly adjacent to cut to prevent vehicular traffic.
3. Extend tank trap full width of road to prevent vehicles bypassing.
4. Seed all disturbed areas with approved seed mix.
5. Cover all seeded areas with straw.
 - a) Straw Bales can be broken up and spread as mulch.
 - b) If Straw matting is used overlap matting a minimum of 6 inches. Use 6 inch ground staples to hold matting in place.
6. Place other debris, such as logs and boulders, along closed road to discourage possible vehicular traffic and to hold mulch in place.

Mulch Rate: _____ lbs./acre

Seeding Mix: _____

Straw Matting: _____ yards

Seeding Rate: _____ Lbs. PLS/Acre

U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE	JOB CLASS	Date
	CAD FILE NO. FOR-0020.dwg	Designed _____
	SHEET OF	Drawn _____
		Checked _____
	Approved _____	