

LOGS

Species _____

Dia. (min) _____ in

L = _____ ft

S = _____ ft


PILING

Material _____


D = _____ ft

Sp = _____ ft

PLAN VIEW

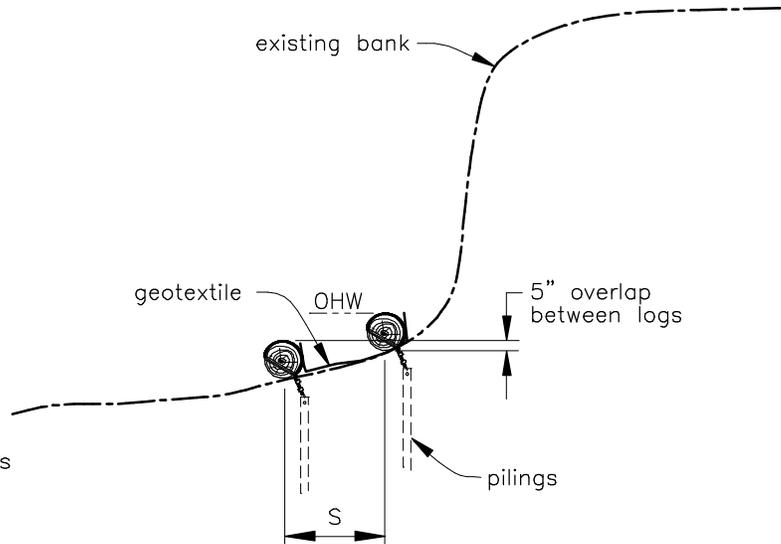


SECTION A

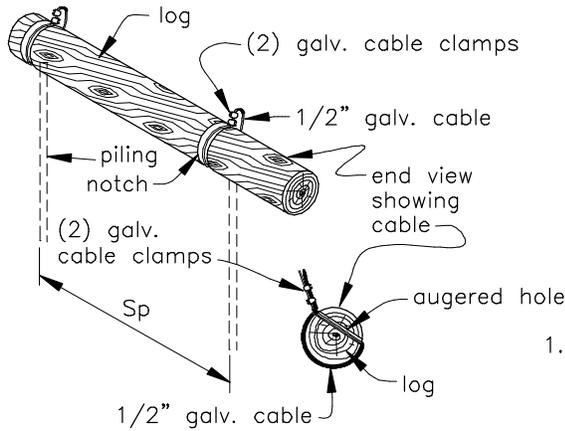

GENERAL NOTES

1. Woody material should be secured by inserting the cable through a hole augered into the log, then looped around the log and clamped back onto itself. Where it is not possible to auger a hole into the log, the log may be notched to recess the cable.
2. Remove the bark at point of contact with the cable, as bark will rot, resulting in slack of the anchoring cable.
3. A minimum of two clamps shall be used to fasten the cable to the log to prevent slippage.
4. Woody material must be anchored tightly so they do not float or move. Use of a turnbuckle can be used to cinch the material to the anchor.
5. This standard drawing requires supporting technical documentation prior to use and must be adapted to the specific site.

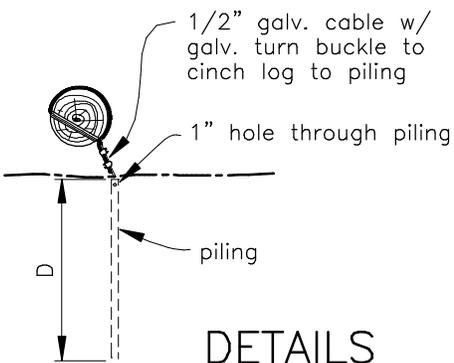

DETAILS

drawing no to scale

	JOB CLASS	Date
	CAD FILE NO. BIO-0045.DWG	Designed _____
	SHEET OF	Drawn _____
U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE		Checked _____
		Approved _____