



LIVESTOCK CROSSING

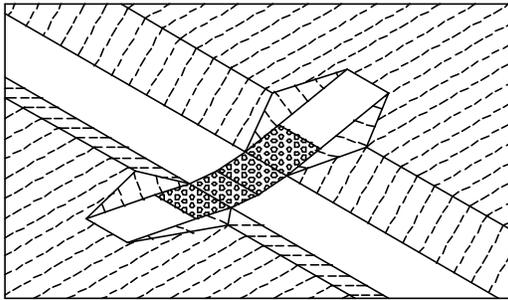


ISOMETRIC

CONSTRUCTION NOTES

1. Crossing surface shall be a minimum of 0.2 ft below channel invert.
2. Surfacing material shall be compacted as per method (4) of CS-15.6.

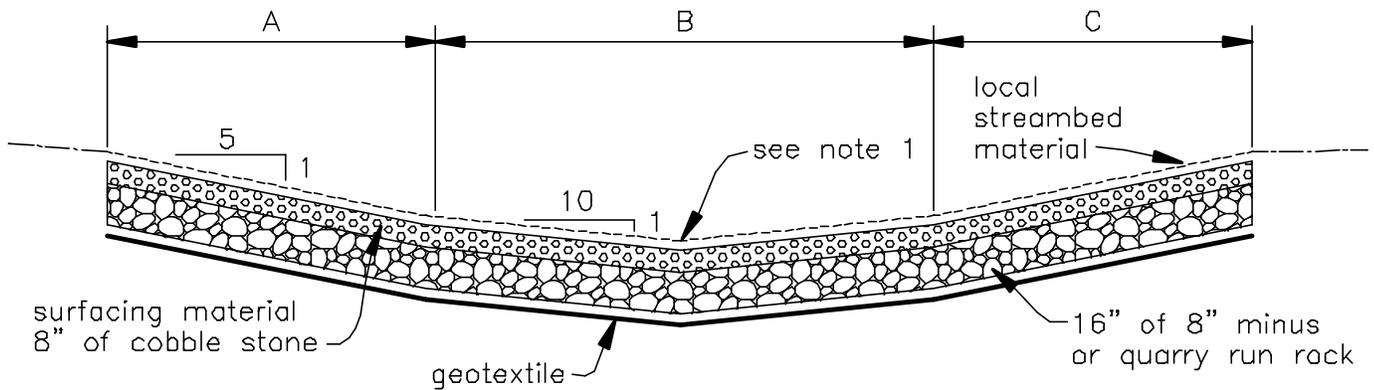

CENTERLINE PROFILE

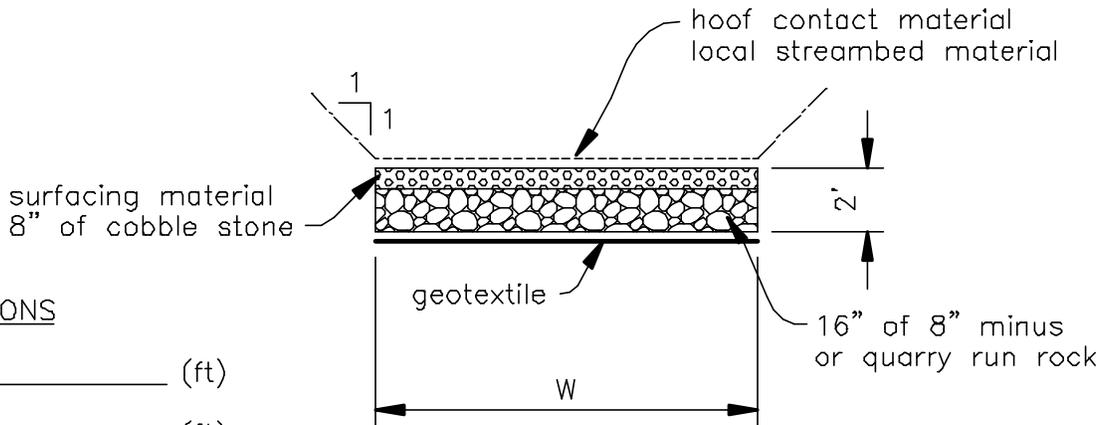

SECTION

DIMENSIONS

A = _____ (ft)

B = _____ (ft)

C = _____ (ft)

W = _____ (ft)

Station _____

Drawing not to scale.

NOTE:

This standard drawing requires supporting technical documentation prior to use and must be adapted to the specific site.

U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE	JOB CLASS _____	Date _____
	CAD FILE NO. LSK-0091.DWG	Designed _____
	SHEET _____ OF _____	Drawn _____
		Checked _____
	Approved _____	