



BARBED WIRE FENCE CROSSINGS

Panels of woven wire or board can be used. Panels built separate and tied to fence with light wire, then during floods ends can break loose and not disturb main fencelines.

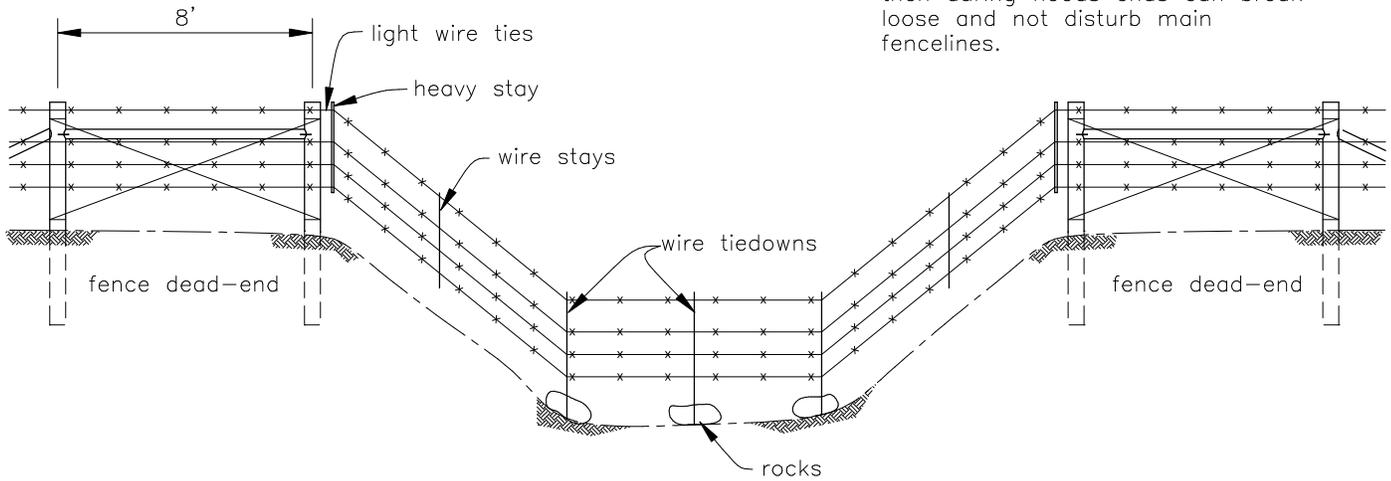


DETACHABLE WIRE PANEL W/ROCK ANCHORS
FOR DEEP WASHES AND LIVE STREAMS

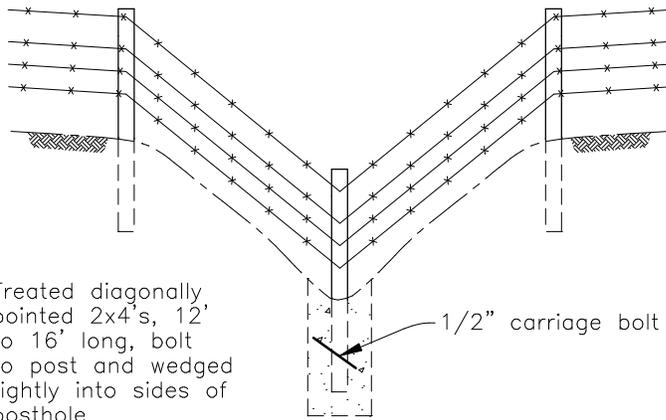

Treated diagonally pointed 2x4's, 12' to 16' long, bolt to post and wedged tightly into sides of posthole.


FENCE POST ANCHOR

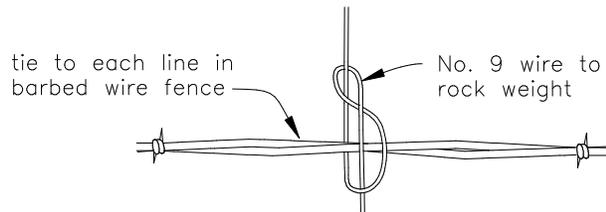

TIEDOWN DETAIL

Drawing not to scale. Standardized drawing must be adapted to the specific site.

1. All corner and brace posts shall be 7' long and 3' embedment.
2. Line posts shall have a minimum length of 6'-6" and 2'-6" embedment.

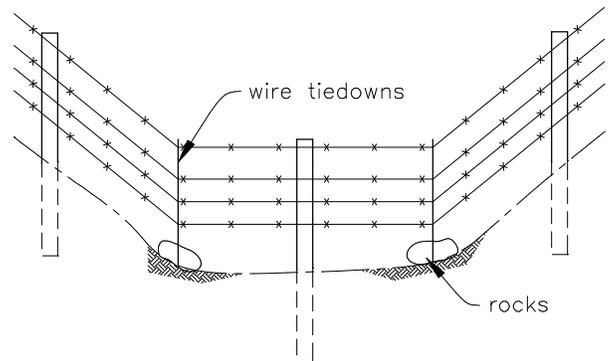

ROCK ANCHORS IN DRY DRAWS
SQUARE ROCK CRIBS ALSO USEFUL

JOB CLASS		Date
CAD FILE NO. LSK-0210.DWG		Designed _____
SHEET OF		Drawn _____
		Checked _____
		Approved _____