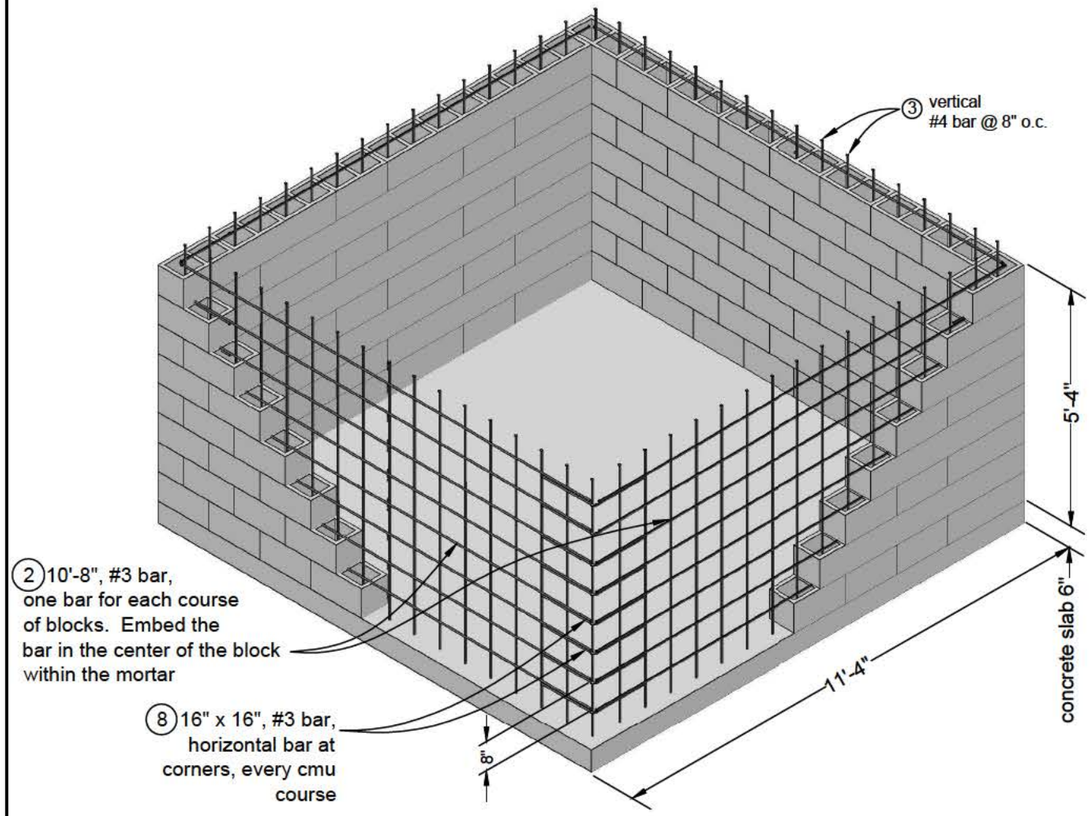

Horizontal Steel Placement

no scale

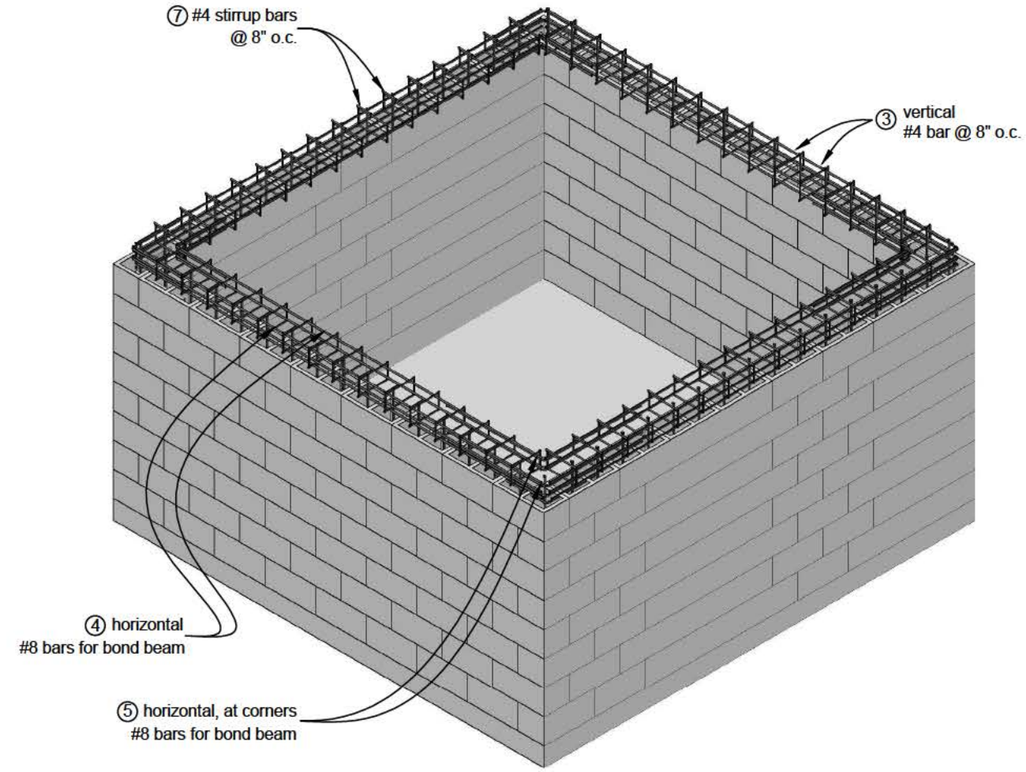

Bond Beam Steel Placement

no scale

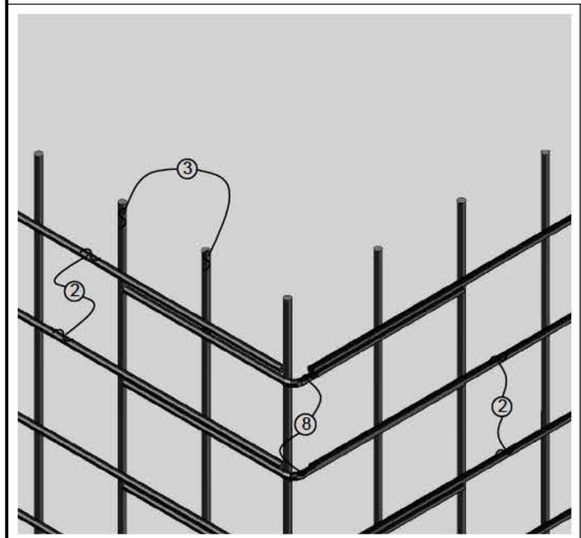

Horizontal Steel Placement - Details

no scale

Steel Schedule

MARK	SIZE	LENGTH	QNTY	TOTAL LENGTH	TYPE	A	B	C	D	E	G
1	5	10'–8"	34	363'	STR	10'–8"	0	0	0	0	0
2	3	10'–8"	32	342'	STR	10'–8"	0	0	0	0	0
3	4	6'–9"	64	470'	20	0	6'–0"	9"	0	0	0
4	8	10'–8"	16	171'	STR	10'–8"	0	0	0	0	0
5	8	7'–0"	16	112'	20	0	42"	42"	0	0	0
6	5	6'–8"	3	22'	STR	7'–2"	0	0	0	0	0
7	4	2'–8"	64	56'	T2	2"	9"	5"	9"	5"	2"
8	3	2'–8"	36	96'	20	0	16"	16"	0	0	0

Notes:
1) Minimum rebar splice lengths no less than 42 X Bar Diameters.
2) Minimum rebar distance from concrete faces and edges no less than 2".
3) All rebar shall be clean (rust free) and have a tensile strength of 40 ksi minimum.

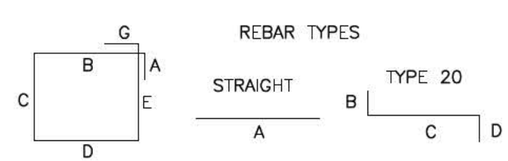

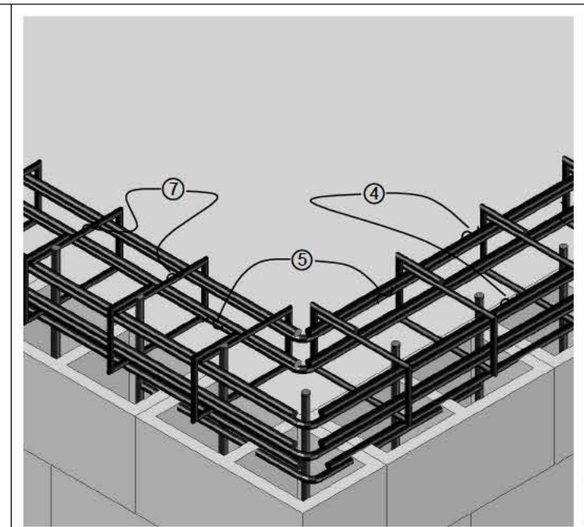

Bond Beam Steel Placement - Details

no scale

Date
Designed
Drawn
Checked
Approved
Title

10' x 10' x 6' Concrete Block Tank (no lid)

Cooperating with the Soil and Water Conservation District

NRCS
Natural Resources Conservation Service
United States Department of Agriculture

File Name
_____.dwg

Drawing No.

Sheet ___ of ___