



Typical foundation treatment is a layer of compacted base course (crushed rock 100% less than 3"), gravel or other approved aggregate, placed in 6" loose lifts and compacted with at least 3 passes of a vibratory plate compactor. See note below

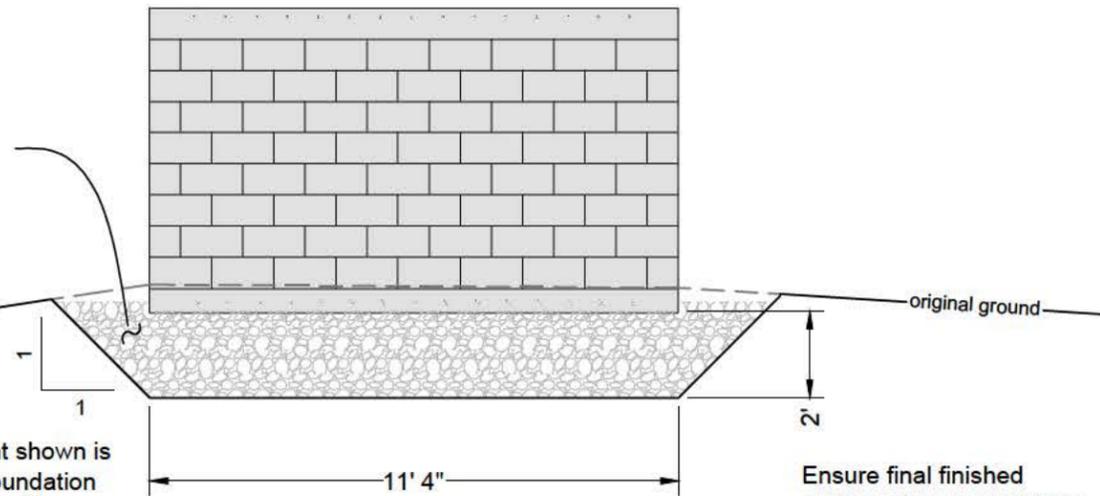

Foundation Treatment shown is typical. Mandatory foundation inspection and approval by NRCS technical representative is required before placement of base course. The final thickness of material under the tank will be reflected in the "As Built" drawings.

**Excavation & Foundation**

Ensure final finished surface slopes away from the tank, i.e. avoid having surface water pond near or enter the tank.

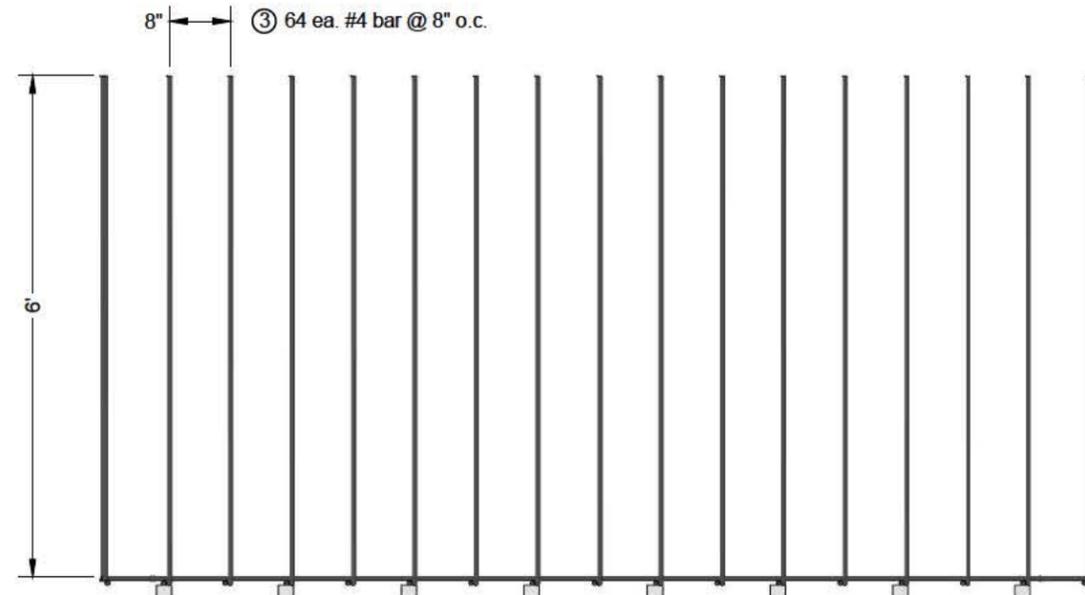

**Vertical Steel Placement**  
no scale


2"x2"x3" concrete chairs placed at 16" on center

Date \_\_\_\_\_  
Designed \_\_\_\_\_  
Drawn \_\_\_\_\_  
Checked \_\_\_\_\_  
Approved \_\_\_\_\_  
Title \_\_\_\_\_


10' x 10' x 6' Concrete Block Tank (no lid)  
Cooperating with the \_\_\_\_\_ Soil and Water Conservation District



File Name \_\_\_\_\_ .dwg  
Drawing No. \_\_\_\_\_  
Sheet \_\_\_ of \_\_\_

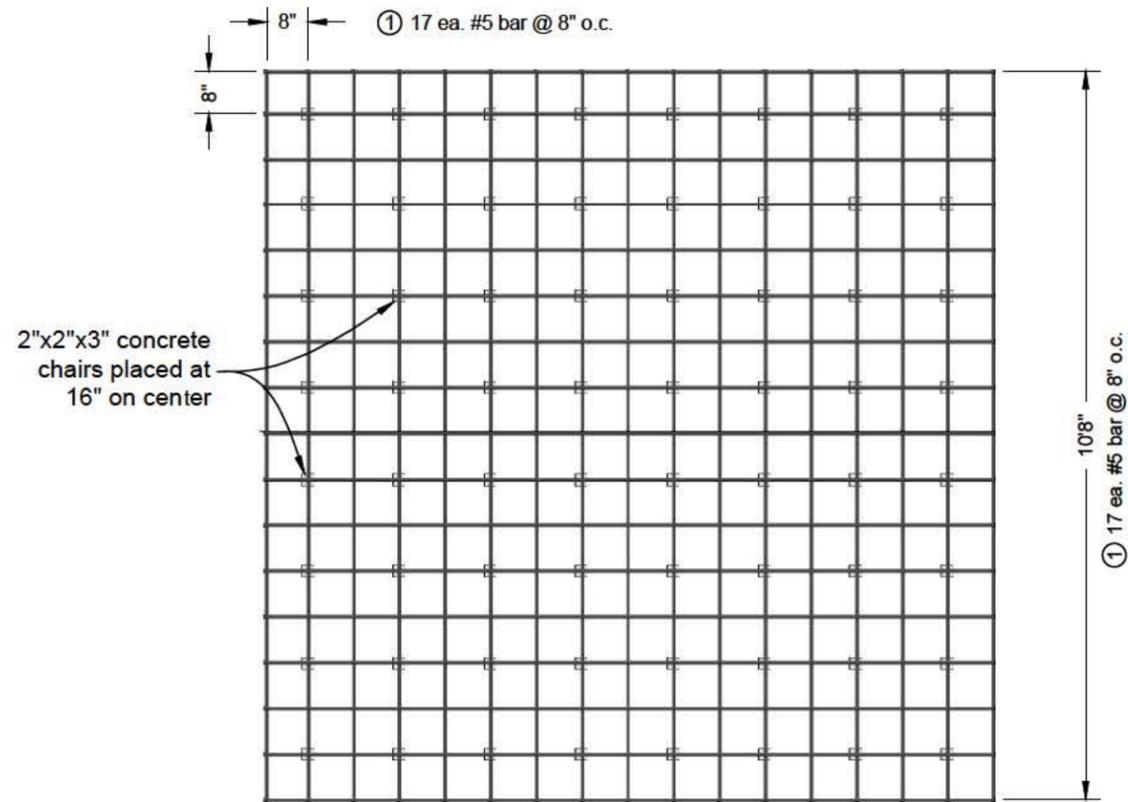

**Pad Steel Placement**  
no scale

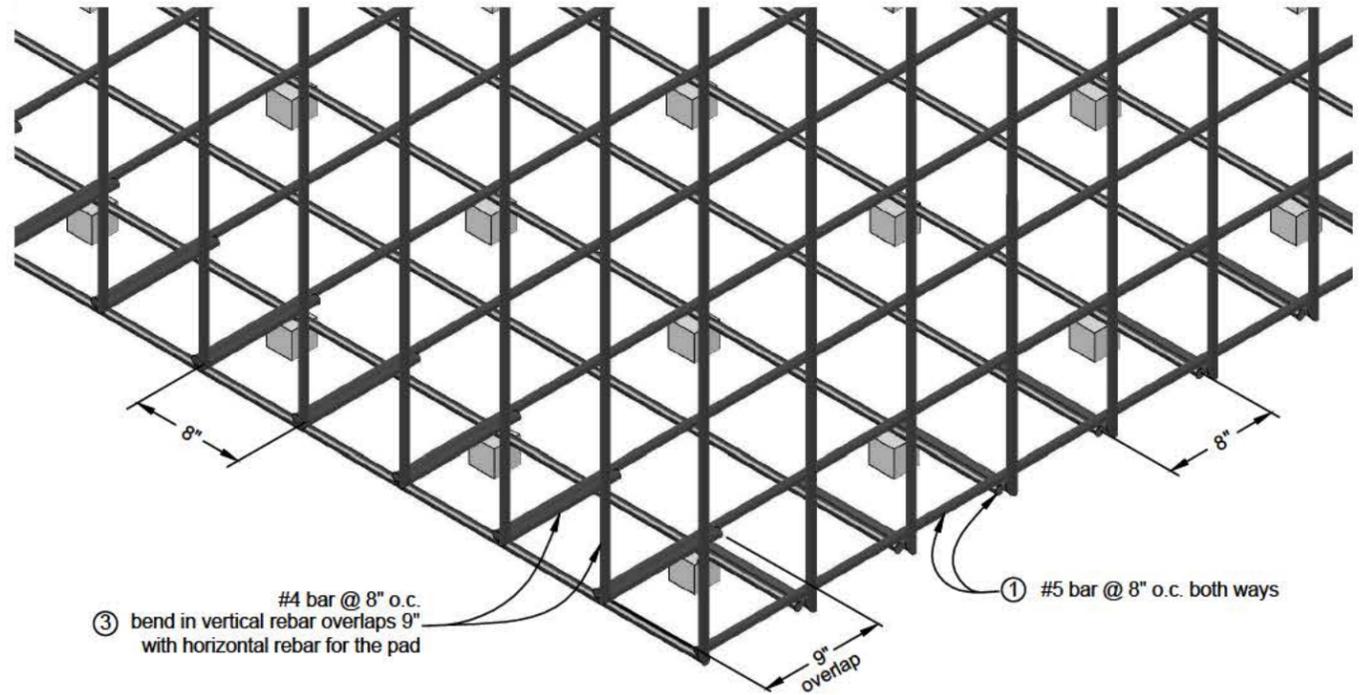

**Pad and Vertical Steel Placement**  
no scale